



LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D

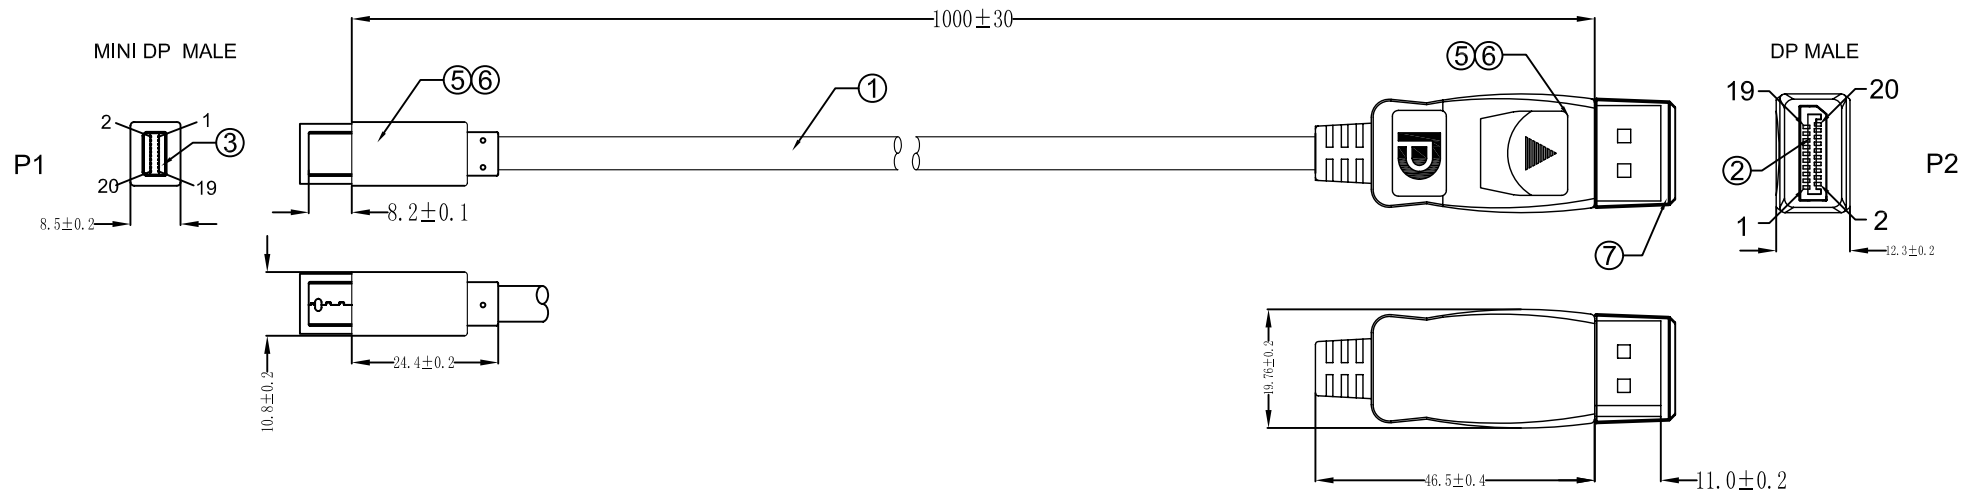

Note:

1. 100% short circuit, open;
2. insulation impedance: $2M\Omega$ Min.
3. Voltage: DC 350V FOR 0.1 Sec
4. Contact impedance: 5Ω Max.

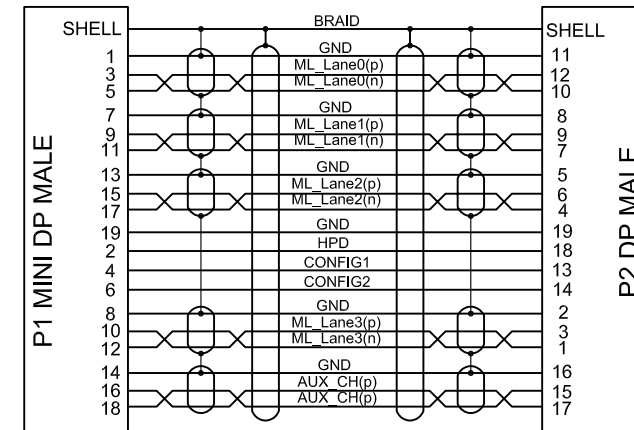

7	DUST COVER	MINI DP DUST COVER	1PCS											
6	DUST COVER	DP DUST COVER	1PCS		Tol. Inch M/M			EBE TECHNOLOGY(HK) LIMITED						
5	OVER MOLD	WHITE 45P PVC	A/R		.X	.015	0.30							
4	INNER MOLD	LD-PE	A/R		.XX	.010	0.10							
					.XXX	.005	0.05	Title: MINI DP M TO DP M WHITE CABLE						
3	CONN.	MINI DP MALE , CONTCAT:GOLD;SHELL:NI PLANTED, INSULATION:WHITE	1PCS		Draw: LUHUAXIN									
2	CONN.	DP MALE , CONTCAT:GOLD;SHELL:NI PLANTED, INSULATION:BLACK	1PCS		Check:			Customer P/N:						
1	CABLE	UL20276(2C*32#+D+AL+MY)*5C+5C*32#+MY+AL+B DP JACKET:WHITE PVC OD:5.5mm	1PCS					Sample No: SM-110627-D01						
ITEM	NAME	DESCRIPTION	Q' TY	REMARK	App'd:	Units:	m/m	Date	28-06-11'	REV.	A			
						Angle	±°	Third Angle Projection		Sheet	1/1			
						Scale	NONE							