



RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D

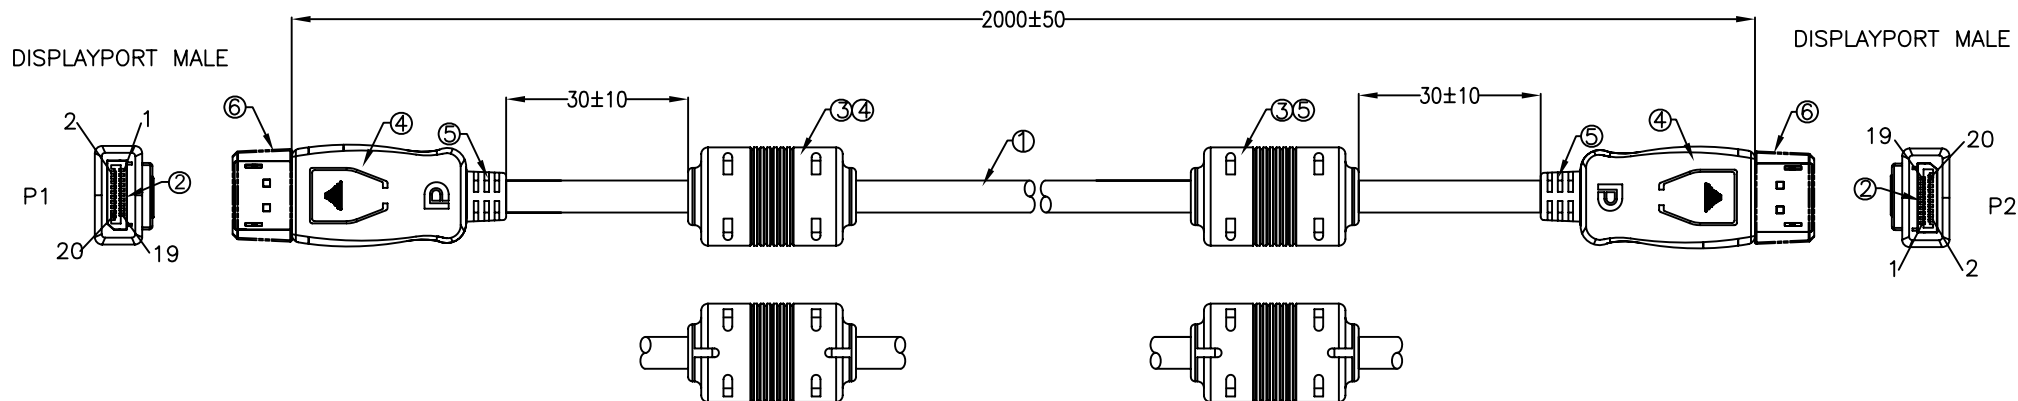

NOTE:
 1. 100% OPEN/SHORT TEST;
 2. CONTACT RESISTANCE:3Ω;
 3. INSULATOR RESISTANCE:5MΩ Min.
 DC 350V AT 10ms;

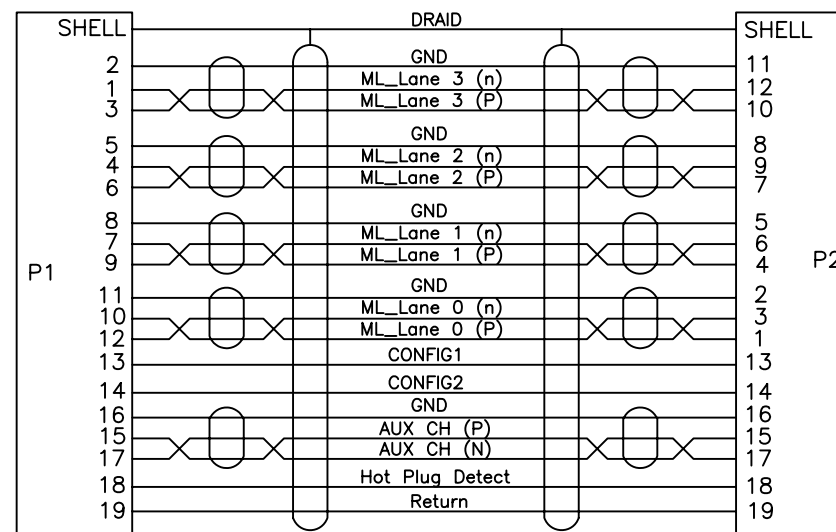

6	DUST	PE DUST DP	2	
5	PLASTIC	PVC 45P BLACK	A/R	
4	PE	LD-PE	A/R	
3	CORE	ø17.5*28.5*ø10.5mm	2	
2	CONN.	DP 20PIN MALE, SOLDER TYPE.HI-TEMP PLASTIC,BLACK(MOLEX)	2	
1	CABLE	UL20276 (30#*1P+D+AL+MY)*5C+30#*4C+F+AB OD:6.5mm BLACK CABLE	1	
ITEM	NAME	DESCRIPTION	Q'TY	REMARK

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
Draw: LUHUAXIN		
Check:		
App'd:		

EBE TECHNOLOGY(HK) LIMITED

Title: DP M TO DP M +CORE*2 BLACK CABLE

Customer P/N:

Drawing No:

Units	m/m	Date	11-01-10	REV.	A
Angle	± °	Third Angle Projection		Sheet	1/1
Scale	NONE				