





RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D

DP M+PCBA

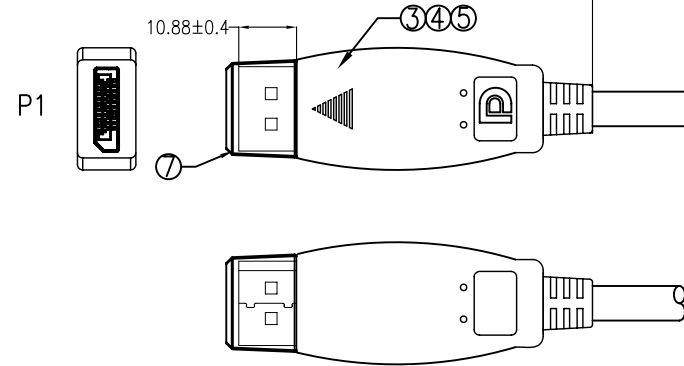

DVI_D(24+1) M

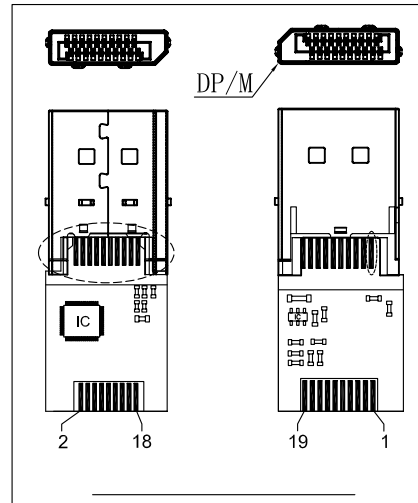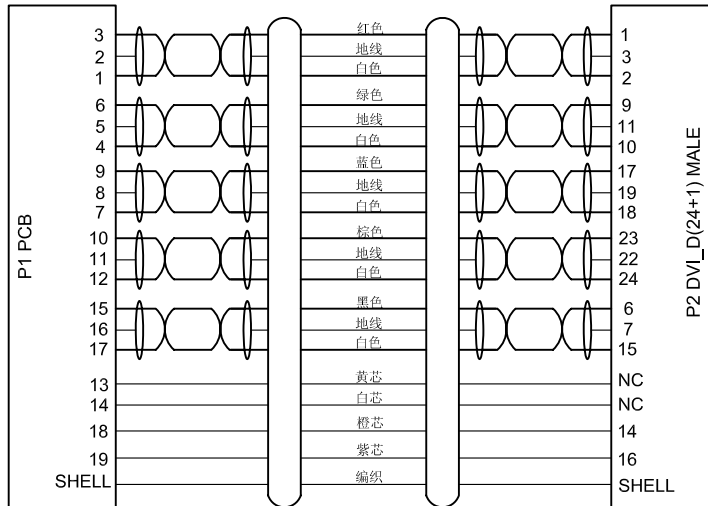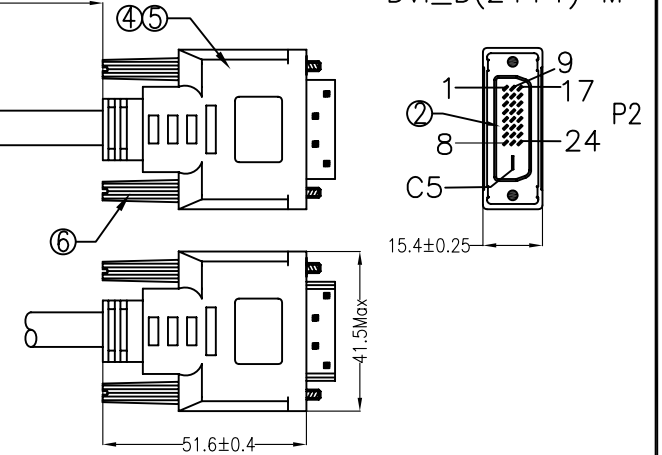

NOTE : (DP TO DVI实机检测)

1. 信号源解晰度UXGA 080P(1920*1080)
2. 刷新率:60HZ
3. 视频呈象无信号抖动, 拖影, 重影, 缺色等显示异常

ITEM	NAME	DESCRIPTION	Q'TY	REMARK
7	DUST	透明 DP 防尘盖	1PCS	
6	SCREW	#4-40 THUMBSCREW STELL NICKEL PLATED WHITE ABS	2PCS	
5	PE	透明PE料	AR	
4	PVC	WHITE PVC 45P	AR	
3	CONTACT	DP MALE + PCB(LT8611I) 外壳镀镍, 端子半金锡 不带卡钩	1PCS	
2	CONTACT	DVI_D(24+1)公头焊线式 前镍后锡 端子G/F 黑色胶芯	1PCS	
1	CABLE	UL20276(2C*32#+D+AL+MY)*5C+5C*32#+MY+AL+B DP 白色 OD:5.5mm	1PCS	

Tolerance	Inch	M/M	EBE TECHNOLOGY(HK) LIMITED			
.X	.015	.30				
.XX	.010	.10	Title: DP MALE TO DVI_D(24+1) MALE WHITE CABLE			
.XXX	.005	.05				
Draw: LUHUAXIN			Customer P/N:			
Check:			Drawing No:			
App'd:			Units	m/m	Date	30-07-10'
			Angle	±°	REV.	A
			Scale	NONE	Third Angle Projection	Sheet 1/1