

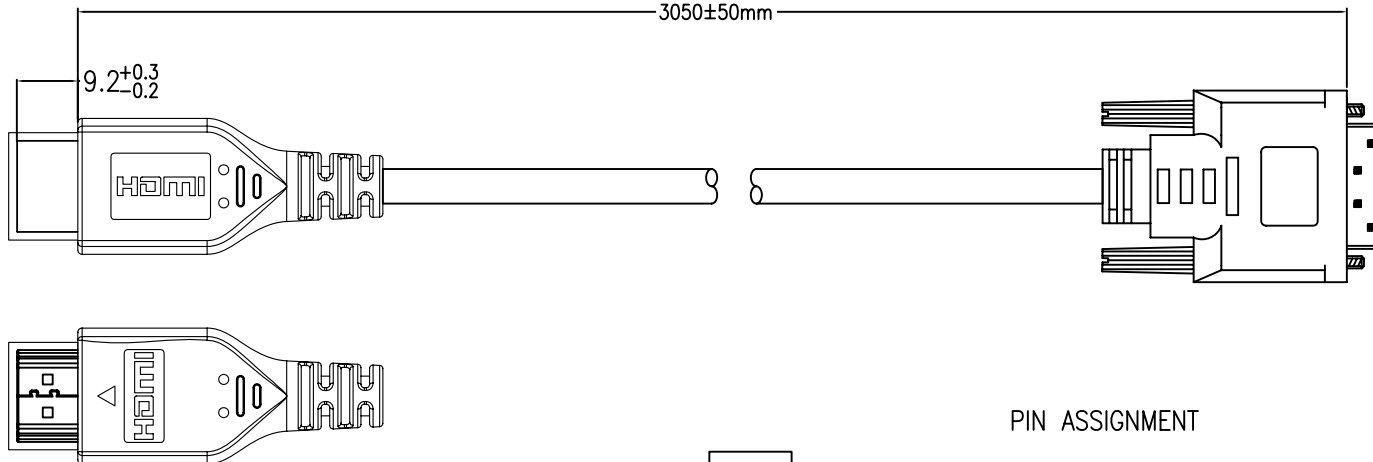


LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D

-3050±50mm



DVI_D(18+1)MALE



P2

HDMI P1			DVI D P2
1	BROWN	2	
3	WHITE	1	
2	DRAID GROUND	3	
4	BLUE	10	
6	WHITE	9	
5	DRAID GROUND	11	
7	RED	18	
9	WHITE	17	
8	DRAID GROUND	19	
10	GREEN	23	
12	WHITE	24	
11	DRAID GROUND	22	
15	ORANGE	6	
16	YELLOW	7	
17	BLUE	15	
18	GREEN	14	
19	VIOLET	16	
SHELL	BRAID	SHELL	

- 1.100% OPEN SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE 4 OHM MAX
- 3.INSULATION RESISTANCE 5M/OHM MIN AT DC500V

					Tolerance Inch		M/M		EBE TECHNOLOGY(HK) LIMITED						
					.X	.015	.30								
6	PE	LD—PE		A/R		.XX	.010	.10	Title: HDMI A TYPE 19P TO DVI(18+1)M BLACK CABLE						
5	SCREW	#4-40 THUMBSCREW STELL NICKET PLATED,COLOR:BLACK PLASTIC		2PCS		.XXX	.005	.05							
4	PLASTIC	PVC 45P COLOR:BLACK		A/R		Draw: LUHUAXIN			Customer P/N:						
3	CONTACT	DVI_D(18+1) MALE SHELL:NI PLATED;CONNTACT:G/F,COLOR:BLACK		1PCS					PART NUMBER:						
2	CONTACT	HDMI 19P MALE CONTACT:G/F;SHELL:NI PLATED;COLOR:BLACK		1PCS		Check:			Drawing No:						
1	CABLE	UL20276(32#*1PR+EAM)*4C+32#*1PR+32#*5C+AEB BLACK JACKET OD:5.5mm		1PCS		App'd:			Units	m/m	Date	05-08-10'	REV.	A	
									Angle	±	○	Third Angle Projection 		Sheet	1/1
ITEM	NAME	DESCRIPTION	Q'TY	REMARK					Scale	NONE					