



RoHS-COMPLIANT

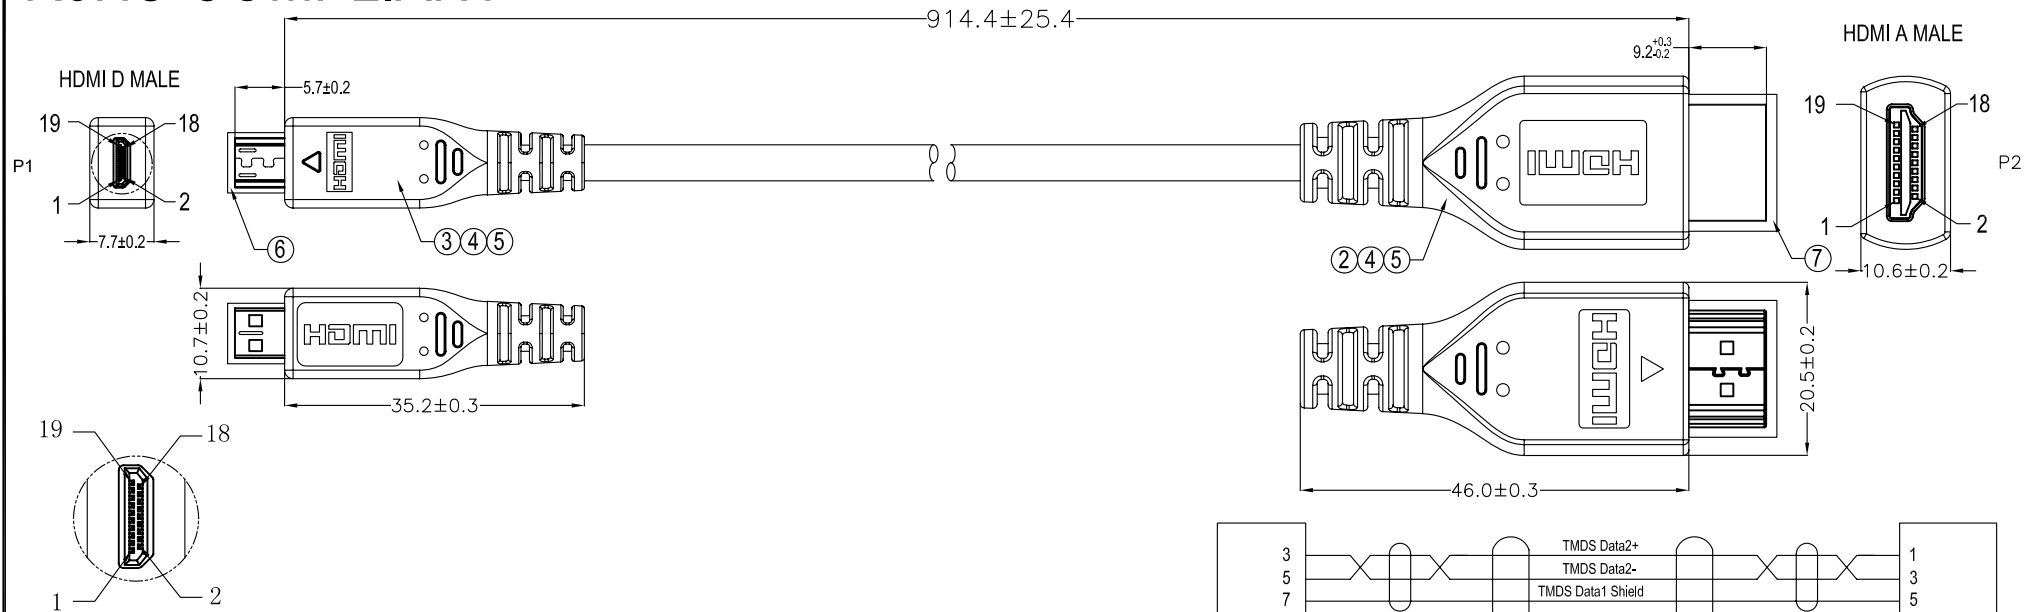

NOTE:

1. 100% OPEN, SHORT & MISWIRE TEST;
2. INSULATION RESISTANCE: 5MΩ Min.
DC 300V 0.1 Sec.;
3. CONTACT RESISTANCE: 3Ω Max.
4. REAL MACHINE TEST:
 - a) RESOLUTION: 1920*1080
 - b) REFRESH RATE: 60 Hz

LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D

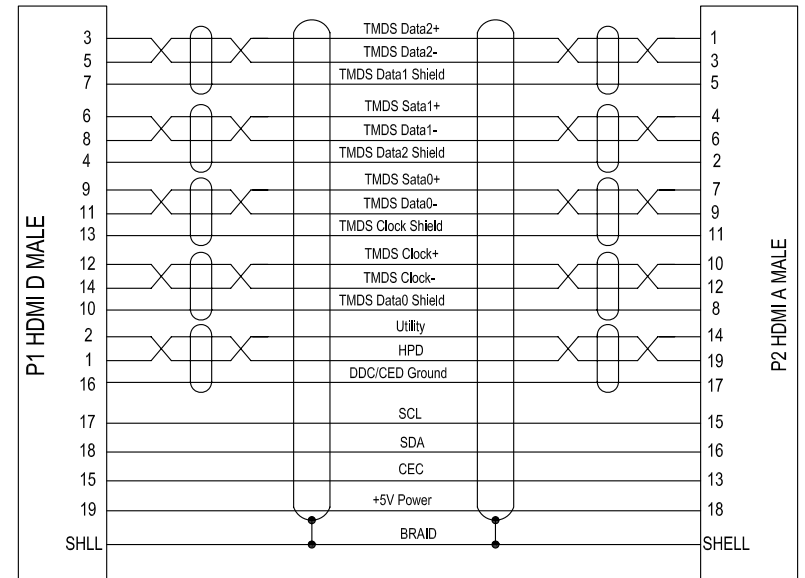

7	SHIELD	TRANSPARENT HDMI D SHIELD	1	
6	SHIELD	TRANSPARENT HDMI A SHIELD	1	
5	OVERMOLD	BLACK PVC 45P	A/R	
4	INNERMOLD	LD-PE	A/R	
3	CONN.	HDMI D MALE CONTACT:15U",INSULATOR:BLACK, SHELL:GOLD PLATED	1	
2	CONN.	HDMI A MALE CONTACT:15U",INSULATOR:BLACK, SHELL:GOLD PLATED	1	
1	CABLE	High Speed HDMI™ Cable With Ethernet [34#(7/0.06TC)*1P+D(7/0.08TC)+AL/ML)*5C +34#(7/0.06TC)*4C+AL/ML+BARID(16*8/0.08TC) BLACK PVC OD:4.2mm	1	
ITEM	NAME	DESCRIPTION	QTY	REMARK

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
Draw:	LUHUAXIN	
Check:		
App'd:		

EBE TECHNOLOGY(HK) LIMITED

Title: **HDMI A TYPE MALE TO
HDMI D TYPE MALE BLACK CABLE**

Customer P/N.:

Samples No.:

Units	m/m	Date	12-06-11'	REV.	A
Angle	± °	Third Angle Projection		Sheet	1/1
Scale	NONE				