



RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D

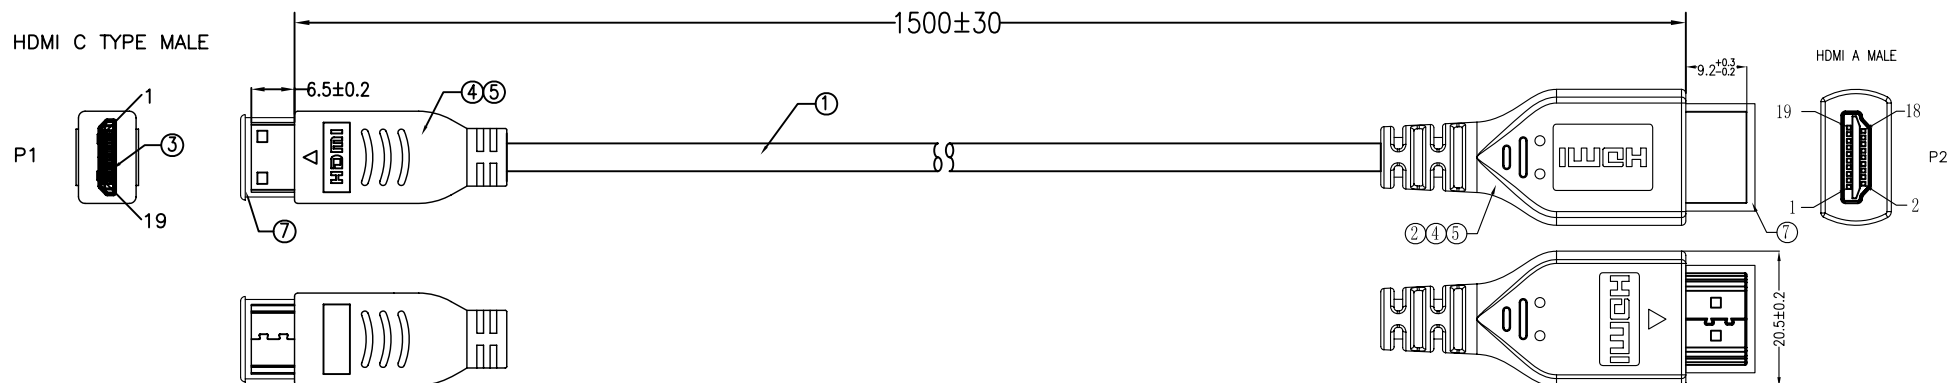

NOTE:

1. 100% OPEN,SHORT & MISWIRE TEST;
2. INSULATION RESISTANCE: 5MΩ Min.
DC 250V 0.1 Sec.;
3. CONTACT RESISTANCE: 5Ω Max.

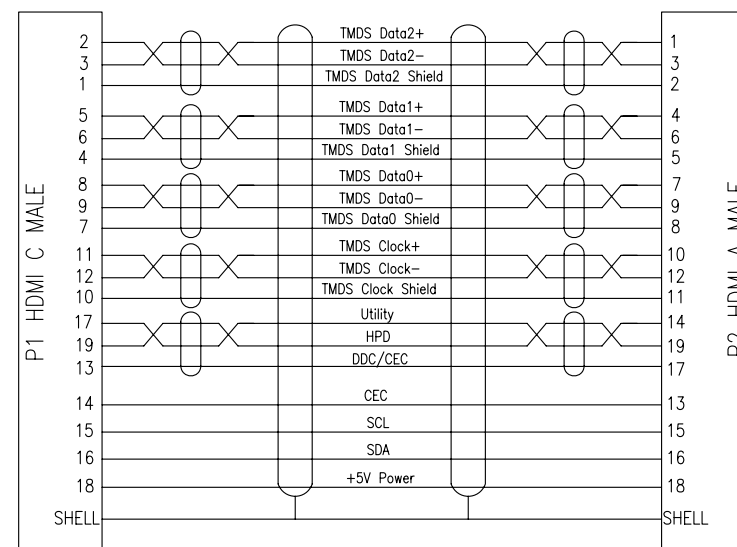

7	SHIELD	TRANSPARENT HDMI C SHIELD	1	
6	SHIELD	TRANSPARENT HDMI A SHIELD	1	
5	OVERMOLD	BLACK PVC 45P	A/R	
4	INNERMOLD	LD-PE	A/R	
3	CONN.	HDMI C MALE CONTACT:15U",INSULATOR:BLACK, SHELL:GOLD PLATED	1	
2	CONN.	HDMI A MALE CONTACT:15U",INSULATOR:BLACK, SHELL:GOLD PLATED	1	
1	CABLE	UL20276 [34#*1P+D+AL/ML)*5P+34#*4C+AL+BARID JACKET:BLACK PVC OD:4.2mm	1	
ITEM	NAME	DESCRIPTION	QTY	REMARK

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
Draw:	LUHUAXIN	
Check:		
App'd:		

EBE TECHNOLOGY(HK) LIMITED					
Title: HDMI A TYPE MALE TO HDMI C TYPE MALE BLACK CABLE					
Customer P/N.:					
Samples No.:					
Units	m/m	Date	26-10-11'	REV.	A
Angle	± °	Third Angle Projection		Sheet	1/1
Scale	NONE				