



RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D

MINI DVI PLUG

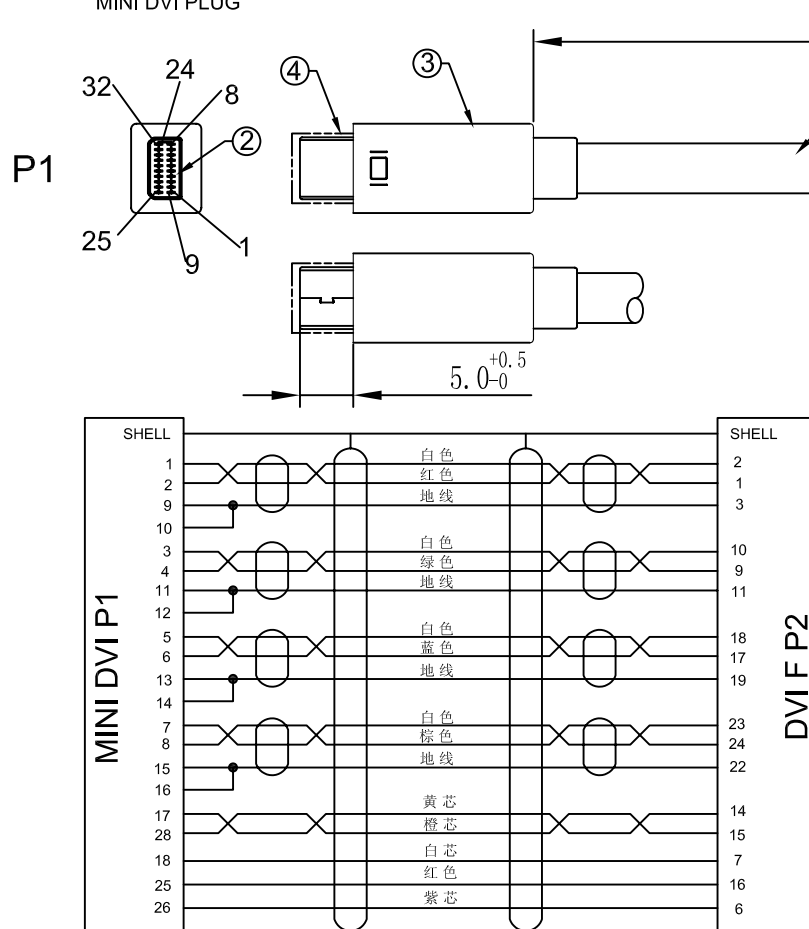

DVI 24+5 FEMALE

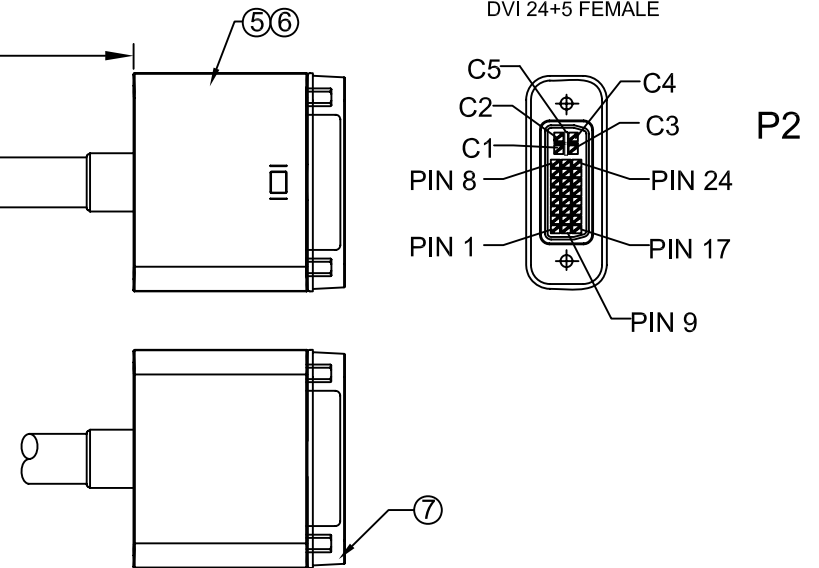

NOTE:

- 100% OPEN, SHORT & MISWIRE TEST;
- INSULATION RESISTANCE: 5MΩ Min.
DC 350V 0.3 Sec. ;
- CONTACT RESISTANCE: 5Ω Max.

7	COVER	PC+ABS CLARITY DVI DUST	1
6	SHELL	BOTTOM SHELL PC+ABS COLOR WHITE	1
		TOP SHELL PC+ABS COLOR WHITE	1
5	DVI	DVI24+5 母头 前镍后锡 G/F 冷灰色胶芯	1
4	COVER	PC+ABS CLARITY MINI DVI DUST	1
3	SHELL	BOTTOM SHELL PC+ABS COLOR WHITE	1
		TOP SHELL PC+ABS COLOR WHITE	1
2	CONN.	MINI DVI CONNECTOR, MALE, GRAY INSULATOR, G/F	1
1	CABLE	UL20276(1P*30#+D+AL+MYLAR)*4C+5C*28#+AL+B JACKET WHITE	1
ITEM	NAME	DESCRIPTION	QTY

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05
Draw: LUHUAXIN		
Check:		
App'd:		

EBE TECHNOLOGY(HK) LIMITED

Title: MINI DVI M TO
DVI24+5 FEMALE CABLE

Customer P/N:

Drawing No:

Units	m/m	Date	20-05-10'	REV.	A
Angle	± °	Third Angle Projection			
Scale	NONE				
Sheet					1/1