
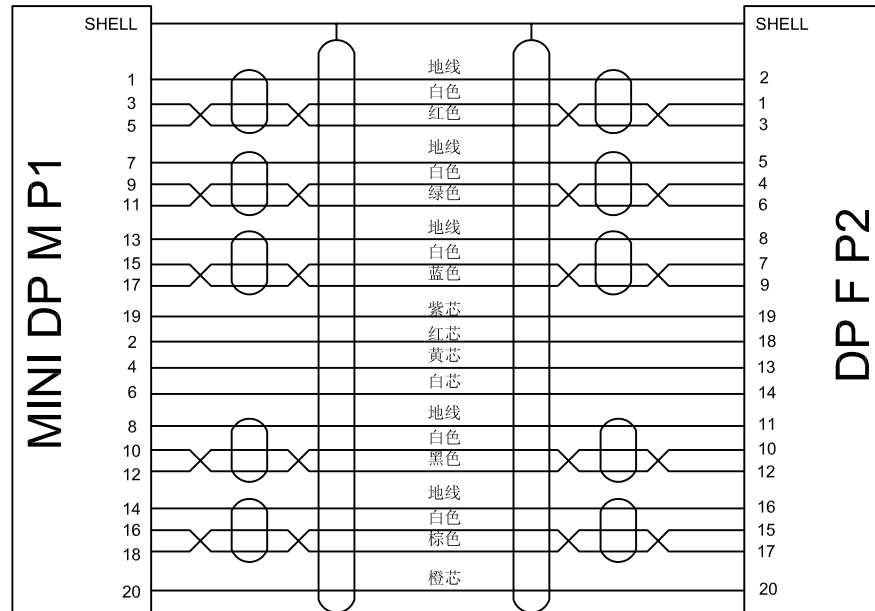


RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D

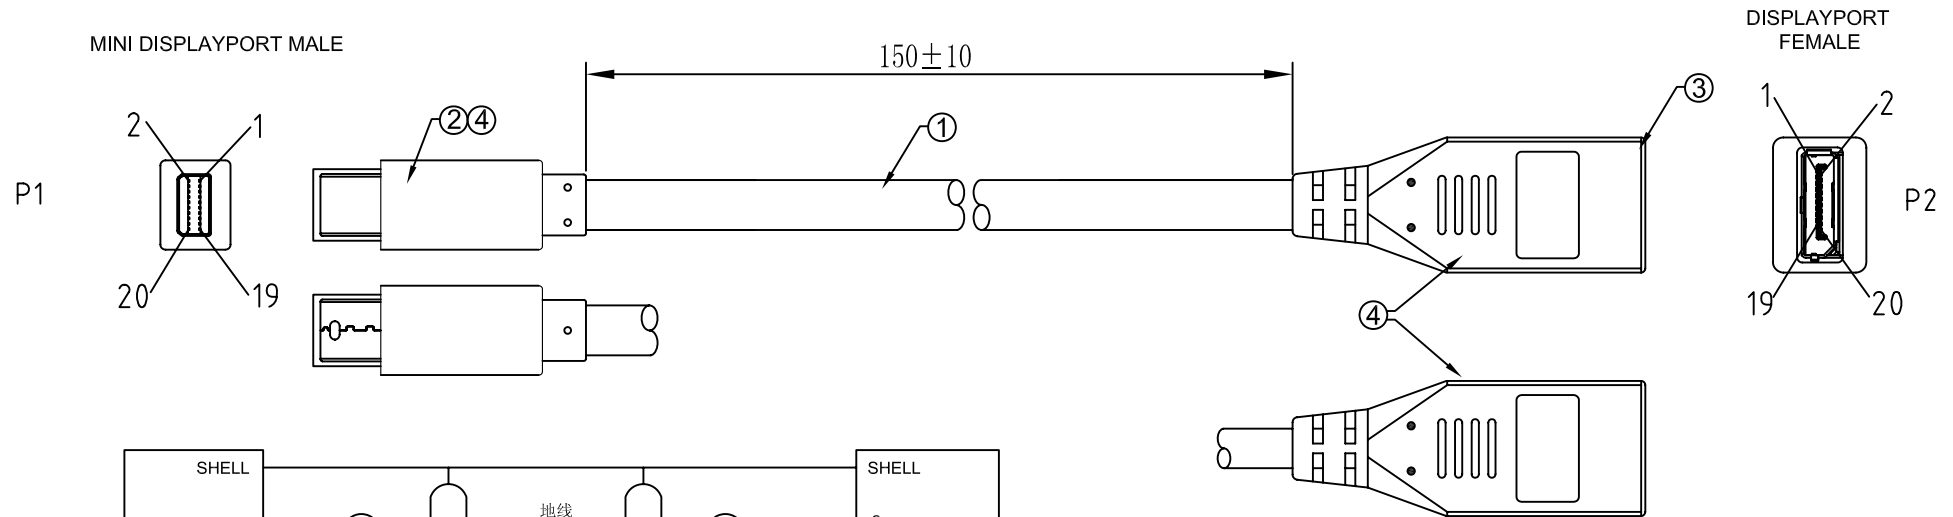

NOTE

1. 100% OPEN, SHORT & MISWIRE TEST;
2. INSULATION RESISTANCE: 2MΩ Min.
3. DIELECTRIC WITHSTANDING VOLTAGE:
DC 300V FOR 0.1 Sec
4. CONTACT RESISTANCE: 5Ω Max.

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw: LUHUAXIN

Check:

App'd:

EBE TECHNOLOGY(HK) LIMITED

Title: MINI DISPLAYPORT M TO
DISPLAYPORT F CABLE

Customer P/N:

Drawing No:

Units	m/m	Date	05-07-10'	REV.	A
Angle	± °	Third Angle Projection		Sheet	1/1
Scale	NONE				

ITEM	NAME	DESCRIPTION	QTY
4	PLASTIC	CONNECTOR OVERMOLD BLACK PVC	A/R
3	CONN.	DISPLAYPORT CONNECTOR,FEMALE RECEPTACLE ASSEMBLY TYPE SUPPORT LATCH MECHANIC	1
2	CONN.	MINI DISPLAYPORT CONNECTOR,MALE ASSEMBLY TYPE	1
1	CABLE	UL20276 32AWG*5C (EAM+D)+32AWG*5C A+B DP OD:5.5mm BLACK L=210mm	1