

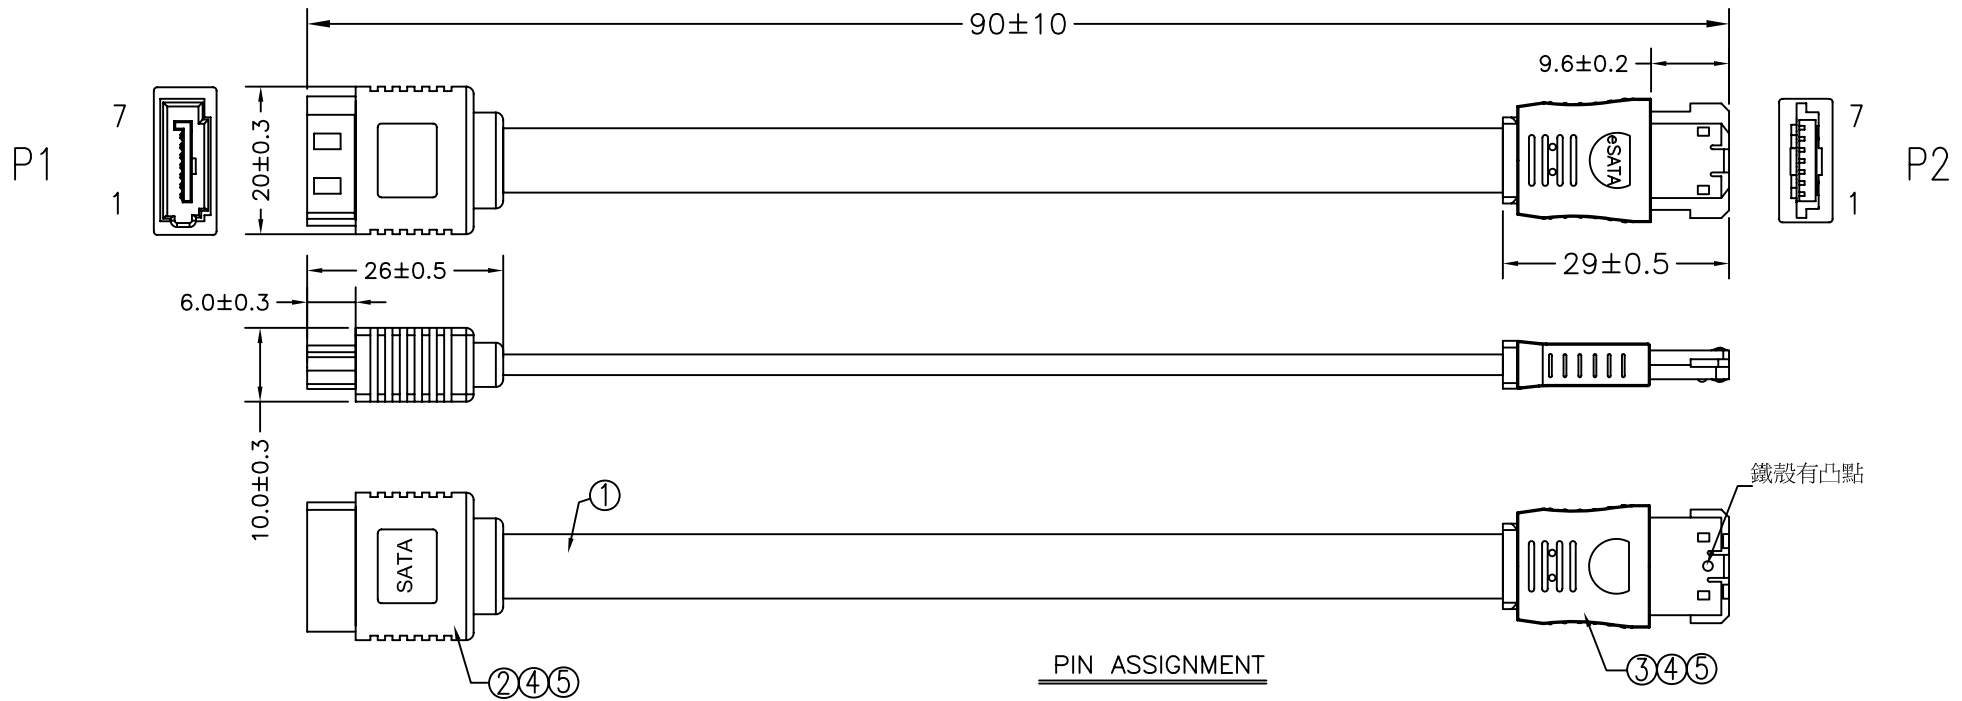


版次	ECN 编号	修改内容	日期	修改人

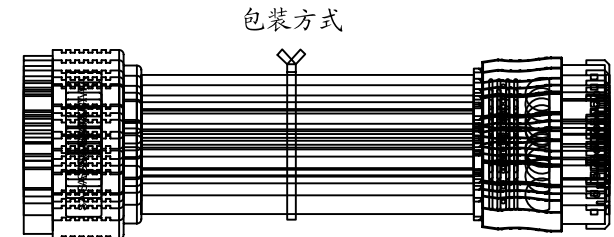

NOTE:
 1.100% OPEN&SHORT WITH MISS WIRE TEST
 2.TEST CODITION:
 1).CONDUCTIVE RESISTANCE:2 ohm Max;
 2).SHORT OPEN DETERMINANT:20K ohm;
 3).INSULATION RESISTANCE:10M ohm(Min) AT DC 300V.

PIN ASSIGNMENT

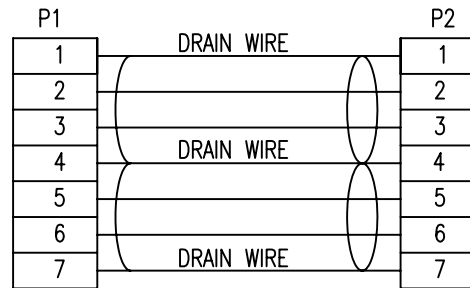

每扎10PCS. 每袋100PCS

5	PVC:45P BLACK FOR OVER MOLD(RoHS)	7.5g
4	PE:LD-PE FOR PREMOLD(RoHS)	3.6g
3	E-SATA 7P/F CONTACT:磷青铜 G/F, 黑色PBT+鐵殼(帶凸點) 鉚壓三件式(RoHS)	1SET
2	SATA 7P/M CONTACT:磷青铜 G/F, 180° CRIMP TYPE ,PBT BLACK 全包式(RoHS)	1PCS
1	UL21149 (26AWG*2C+AL)*2C+3D JACKET COLOR:BLACK OD:7.8*2.2mm (RoHS)	1PCS
ITEM	DESCRIPTION	Q'TY

未标示公差尺寸值 公制单位 .±0.15 .0±0.10 .00±0.05 .000±0.03 ANG.±2° ANG.0±0.5°	原始设计者 / 日期 :		EBE TECHNOLOGY (HK) LIMITED							
	单位 (UNITS)	mm	视角	品名 (NAME): SATA 7P/M TO ESATA 7P/F L=90MM						
	材料 (MTL)	核准 (APP'D)		料号 (PART NUMBER)						
	校对 (CHECK)	绘图 (DRAW)		客户料号 (Customer Part No.)						
品质标记 特殊特性= <input checked="" type="checkbox"/> 重点检验= ▼	绘图 (DRAW)	hubery	比例 (SCALE)	FULL	图纸 (SIZE)	A4	页次 (PAGE)	1/1	版次 (REV.)	X0