



REV	DESCRIPTION	MEMO

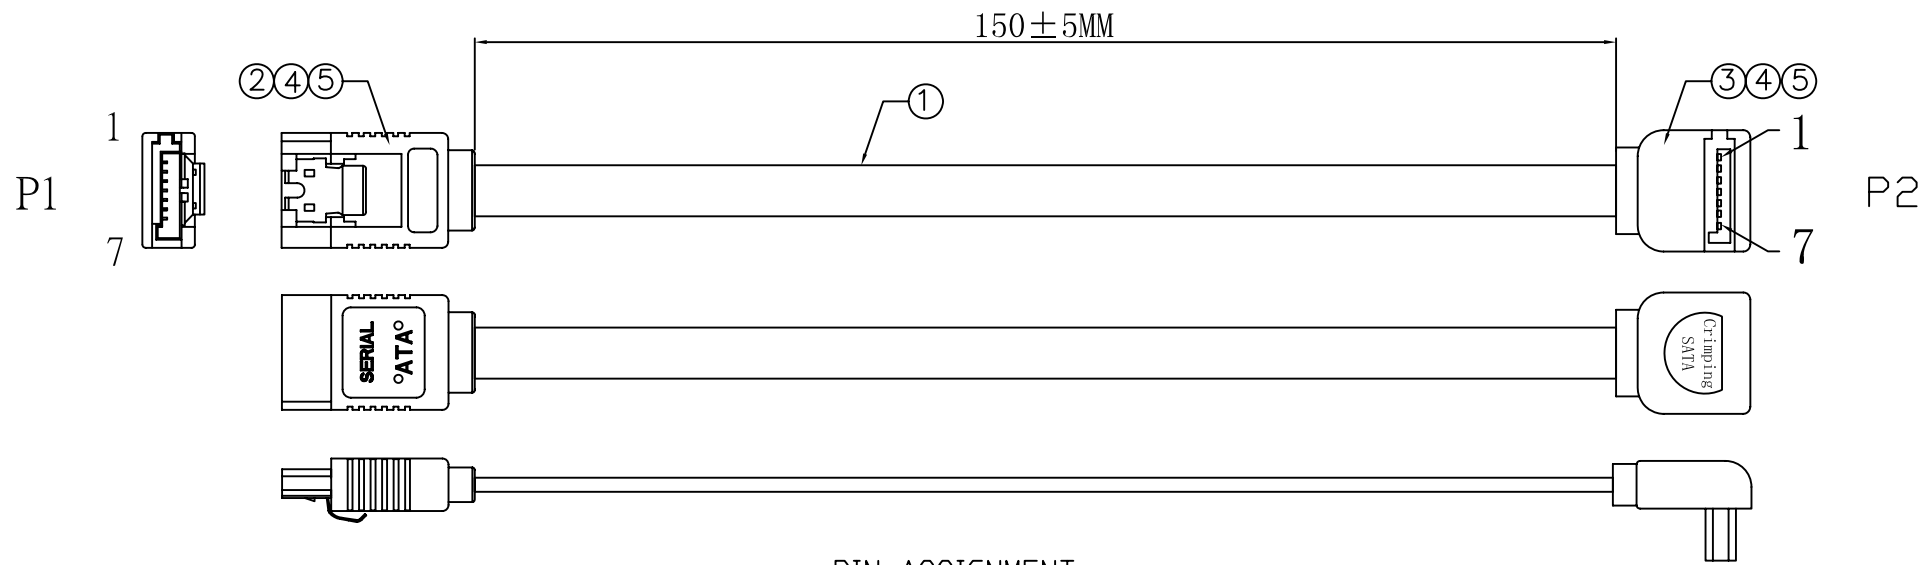


PIN ASSIGNMENT

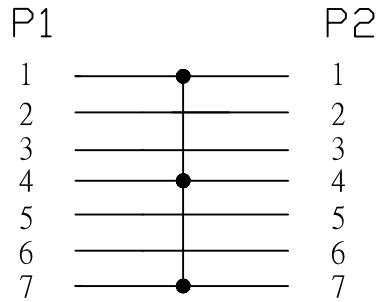

NOTE:

- 100% OPEN SHORT & MISS WIRE TEST
- HI-POT: DC300V
- Contact Resistance: 2Ω
- Insulation Resistance: 10MΩ/Min

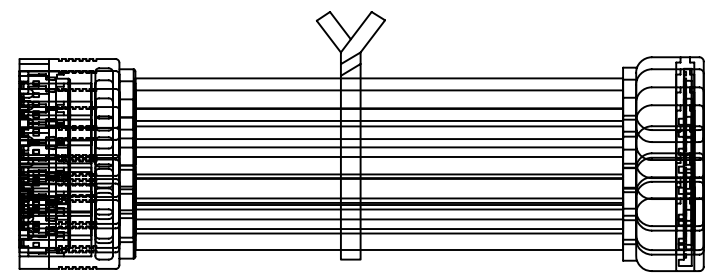

10PCS/把, 50PCS/袋

5	PE	低密度 PE 自然色	6	G
4	PVC	PVC COLOR: BLACK 35P	14	G
3	CONN	SATA 7P/F, 铆压式, 黑胶芯, 端子漂金.		
2	CONN	SATA 7P短弹片 不锈钢	2	PCS
		SATA 7P/F 带弹片铆压式, PHOSPHOR BRONZE G/F, PBT BLACK 短体	2	PCS
1	CABLE	UL21149 (26AWG*2C+AL+D)*2C JACKET RED	AR	M
NO.	PART NAME	STANDARD SPECIFICATION (RoHS COMPLIANT)	Q'TY	UNIT

THIRD ANGLE PROJECTION		DRAWING APPROVAL		EBE TECHNOLOGY (HK) LIMITED	
		DWN:		CUS. CUS P/N: XG540060013	
		CHK:			
TOLERANCES UNLESS OTHERWISE SPECIFIED ONE PLACE DECIMAL .X ±0.4 TWO PLACE DECIMAL .XX ±0.2 THREE PLACE DECIMAL .XXX N/A HOLE DIA. VARIATION .XX N/A ANGULAR DIMENSION (ENG) N/A		APPD:		GRK P/N:	
		SIZE: A4	UNIT: mm	ITEM: SATA 7P/F 90° TO 180°- 带弹片 CABLE	
SCALE:		SHEET: 1 OF 1	CUS, REV: B	GRK REV: 1.0	