




ROHS

REV	DESCRIPTION	MEMO
1.0	INITIAL DESIGN	DEC.29,2010

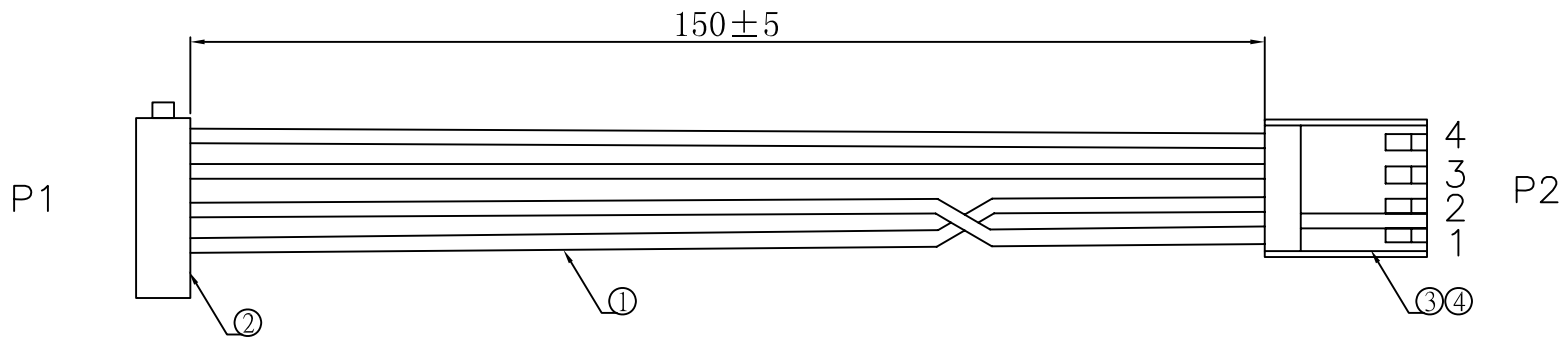

PIN ASSIGNMENT

P1		P2
13+14+15	YELLOW	4
10+11+12	BLACK	3
7+8+9	RED	1
4+5+6	BLACK	2

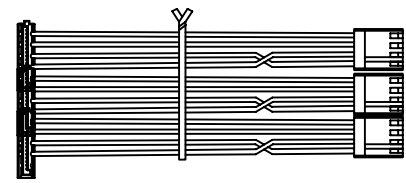

10PCS/把

备注:

1. 100%短路/断路和错线测试。
2. 绝缘阻抗: 10MΩ, DC300V/0.01sec
3. 导通阻抗: 2Ω (MAX)

NO.	PART NAME	STANDARD SPECIFICATION (RoHS COMPLIANT)	Q'TY	UNIT
4	端子	PH:2.5MM, 镀锡端子, A2540-TBe	4	PCS
3	HOUSING	PH:2.5MM, 4P HOUSING, A2540H-04P	1	PCS
2	SATA 15P	SATA 15P 刺破式+90度盖子	1	SET
1	CABLE	UL 1007 20AWG 电子线, L=160MM, 黄*1PCS, 黑*2PCS, 红*1PCS,	AR	M

<p>THIRD ANGLE PROJECTION</p> <p>TOLERANCES UNLESS OTHERWISE SPECIFIED</p> <p>ONE PLACE DECIMAL .X ±0.4</p> <p>TWO PLACE DECIMAL .XX ±0.2</p> <p>THREE PLACE DECIMAL .XXX N/A</p> <p>HOLE DIA. VARIATION .XX N/A</p> <p>ANGULAR DIMENSION (ENG) N/A</p>	DRAWING APPROVAL		EBE TECHNOLOGY (HK) LIMITED	
	DWN:			
	CHK:		GRK P/N:	
	APPD:		ITEM: SATA 15P 刺破式 TO 小4P, L=150MM	
SIZE: A4		UNIT: mm		SHEET: 1 of 1
SCALE:		CUS,REV: A	GRK REV: 1.0	