



版次	ECN 编号	修改内容	日期	修改人

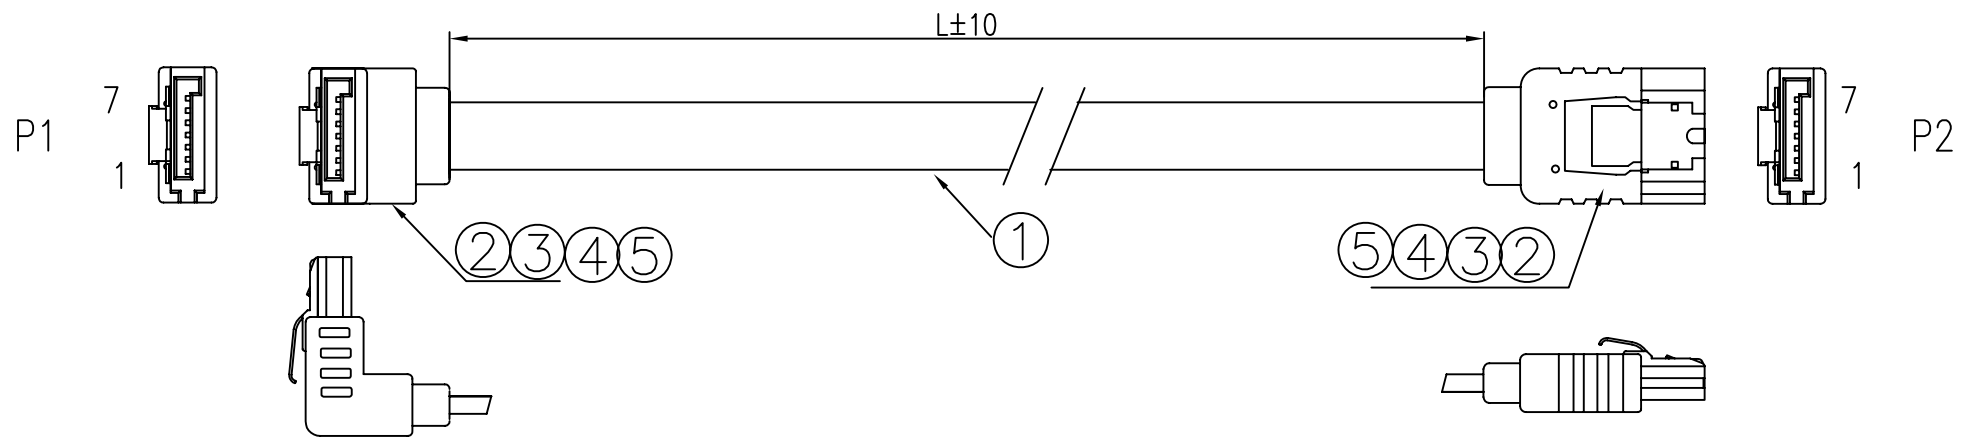


PIN ASSIGNMENT

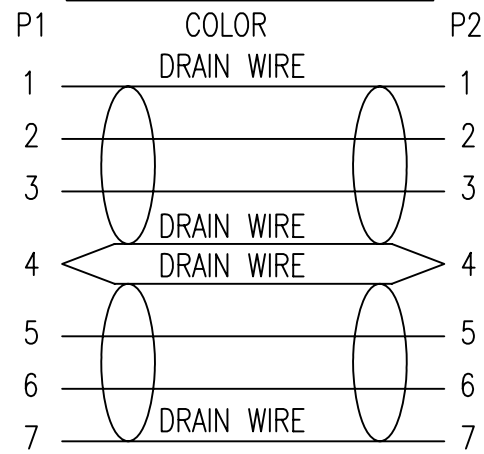

NOTES:
 1.100% OPEN,SHORT,MISS-WIRE TEST.
 2.TEST CONDITION:
 INSULATION RESISTANCE: 20M ohm
 CONDUCTIVE RESISTANCE: 2 ohm
 HI-POT: 300V DC/10ms
 3. THE PRODUCT IS ROHS COMPLIANT.

包装方式

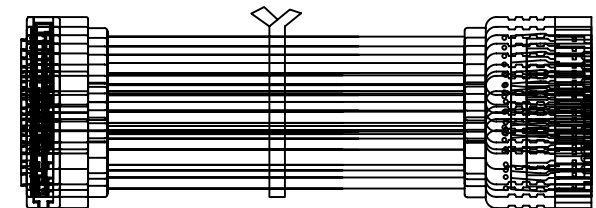

每10PCS黑色扎带一扎

5	OVER MOLD:PVC 45P COLOR:BLACK(RoHS)	12g
4	INNER MOLD:LOW DENSITY PE (RoHS)	12g
3	SATA 7P/F LATCH MATERIAL SUS#301(RoHS)	2PCS
2	SATA 7P/F PHOSPHOR BRONZE G/F 180° CRIMP TYPE	2PCS
	PBT BLACK WITCH SPIRAL(RoHS)	
1	UL2725 (26AWG(1/0.404)*2C+AL/MY)*2F+4D(1/0.32) OD:2.2*7.8mm	1PCS
	RED (D206)PVC JACKET (RoHS)	
ITEM	DESCRIPTION	Q'TY

未标示公差尺寸值 公制单位 .±0.15 .0±0.10 .00±0.05 .000±0.03 ANG.=±2° ANG.0=±0.5°	原始设计者 / 日期 :			EBE TECHNOLOGY (HK) LIMITED							
	单位 (UNITS)	mm	视角	品名 (NAME):							
	材料 (M'L)				SATA 7P 90°WITH LATCH/SATA7P 180° WITH LATCH CABLE						
	核准 (APP'D)				料号 (PART NUMBER)						
品质标记	校对 (CHECK)				图号 (DRAW)						
特殊特性= <input checked="" type="checkbox"/>	绘图 (DRAW)	hubery			客户料号 (Customer Part No.)						
重点检验= ▼				比例 (SCALE)	FULL	图纸 (SIZE)	A4	页次 (PAGE)	1/1	版次 (REV.)	X0