



10	11	12	13	14
版次	ECN 编号	修改内容	日期	修改人

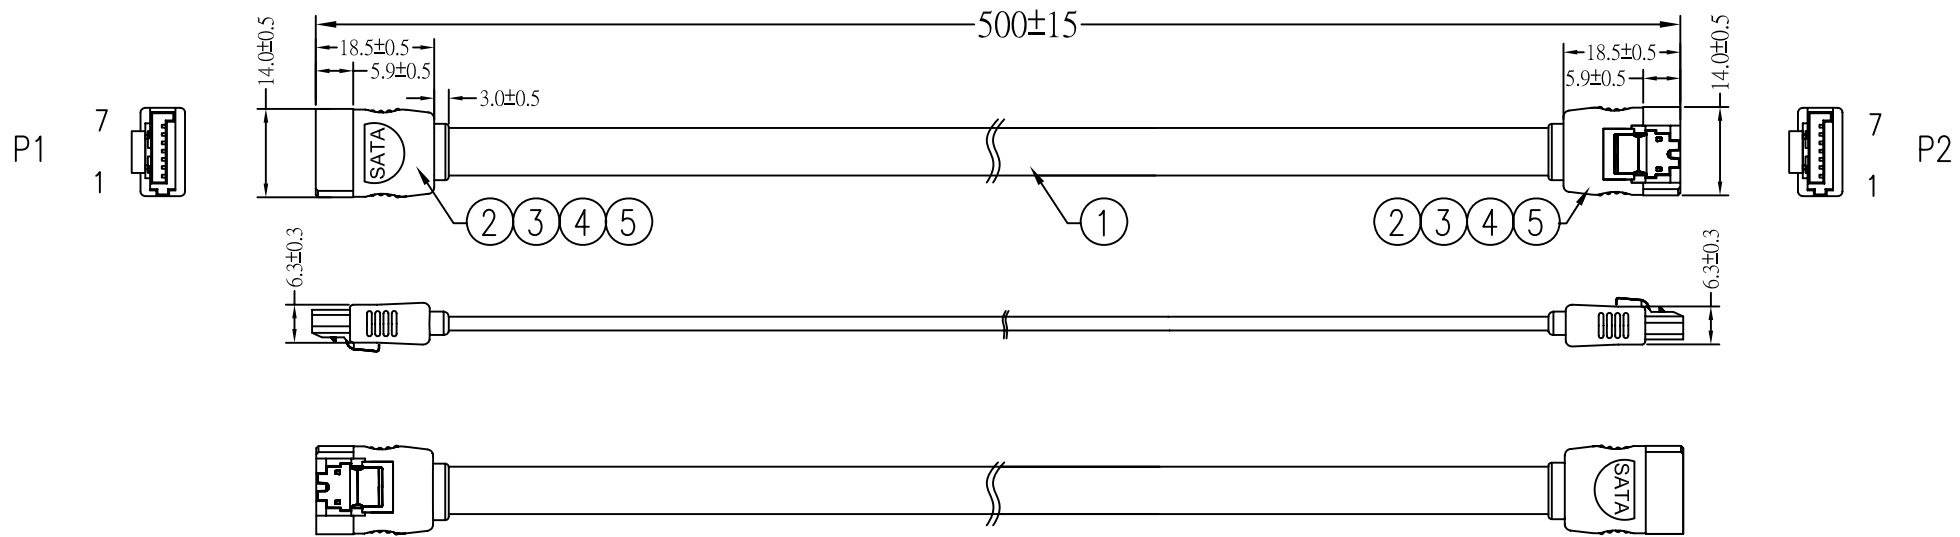

WIRING TABLE

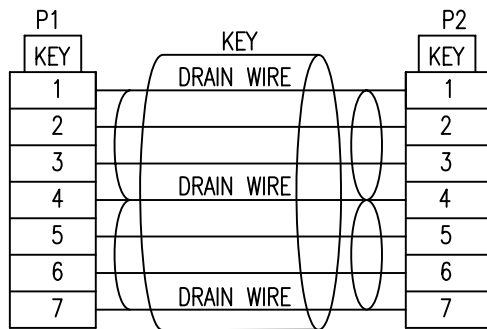

NOTE:

1.100% OPEN&SHORT WITH MISS WIRE TEST

2.TEST CODITION:

- 1).CONDUCTIVE RESISTANCE:5 ohm Max;
- 2).SHORT OPEN DETERMINANT:20K ohm;
- 3).INSULATION RESISTANCE:5M ohm(Min) AT DC 300V.

備註:线材上有Show 6G b/s mark.

5	OVER MOLD:PVC 40P COLOR:WHITE(K181)(RoHS)	3.2g
4	INNER MOLD:LOW DENSITY PE (RoHS)	1.8g
3	SATA 7P/F LATCH MATERIAL SUS#301(RoHS)	2PCS
2	SATA 7P/F PHOSPHOR BRONZE G/F 180° CRIMP TYPE PBT BLACK WITCH SPIRAL(RoHS)	2PCS
1	UL2725 [26AWG*2C(裸铜)+AL/MY+28AWG*2D (镀锡铜)] *2C+PVC JACKETØ2.2*7.8MM JACKET PVC MARK:SATA 6G COLOR:WHITE(K181) L=478±2mm(RoHS)	1PCS
ITEM	DESCRIPTION	Q'TY

未标示公差尺寸值 公制单位 .±0.15 .0=±0.10 .00=±0.05 .000=±0.03 ANG.=±2° ANG.0=±0.5°	原始设计者 / 日期 :		EBE TECHNOLOGY (HK) LIMITED							
	单位 (UNITS)	mm	视角							
	材料 (M'L)	核准 : (APP'D)		品名 (NAME): SATA 7P*2H 180度 带弹片 L=500MM						
	校对 : (CHECK)	绘图 : (DRAW)		料号 (PART NUMBER)						
品质标记 特殊特性= <input checked="" type="checkbox"/> 重点检验= ▼	hubery		客户料号 (Customer Part No.)							
			比例 (SCALE)	FULL	图纸 (SIZE)	A4	页次 (PAGE)	1/1	版次 (REV.)	X0