
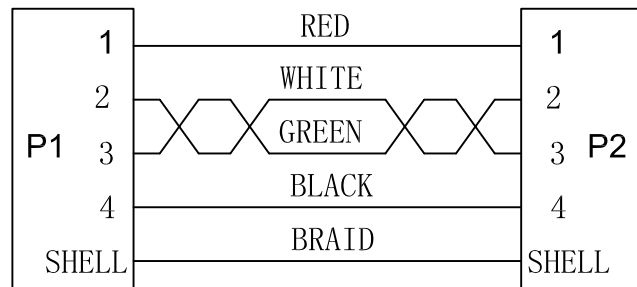


RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE	APP'D

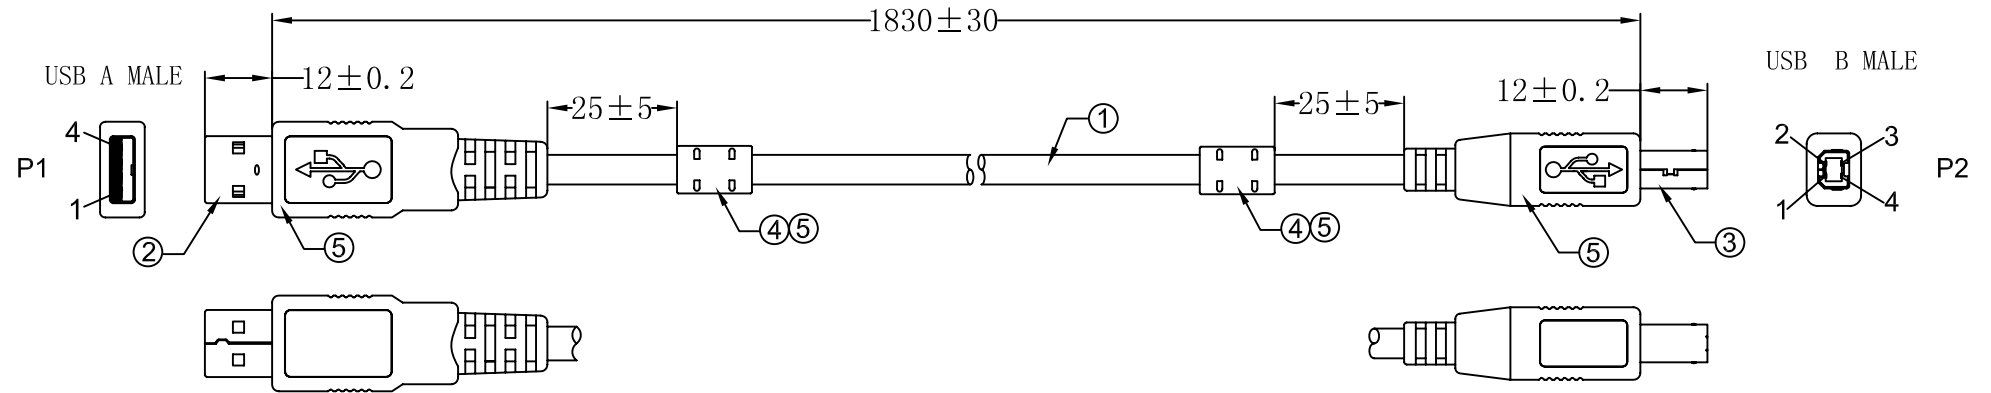

NOET:
 1. 100% OPEN/SHORT TEST;
 2. CONTACT RESISTANCE:5Ω;
 3. INSULATOR RESISTANCE:5MΩ Min.
 DC 350V AT 0.1 Sec;

						Tolerance Inch M/M			EBE TECHNOLOGY(HK) LIMITED						
5	OVER MOLD	BLACK 45P PVC		A/R		.X	.015	.30							
4	CORE	Φ 12. 0*20. 0*Φ 6. 5mm		2		.XX	.010	.10	Title: USB A MALE TO USB B MALE +CORE*2 BLACK CABLE L=6'						
3	CONN.	USB B MALE, CONTACT:GOLD 15U", INSULATOR:WHITE, SHELL:NI PLATED		1		.XXX	.005	.05							
2	CONN.	USB A MALE, CONTACT:GOLD 15U", INSULATOR:WHITE, SHELL:NI PLATED		1		Draw: LUHUAXIN			Customer P/N:						
1	CABLE	UL2725 28#*1P+20#*2C+AEB PVC OD:5. 0 JACKET:BLACK PVC		1		Check:									
ITEM	NAME	DESCRIPTION	Q' TY	REMARK		App'd:			Drawing No.:						
									Units	m/m		Date	26-10-11'	REV.	X1
									Angle	± °		Third Angle Projection 			Sheet
Scale	NONE														