




RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D


USB3.0 A TYPE MALE

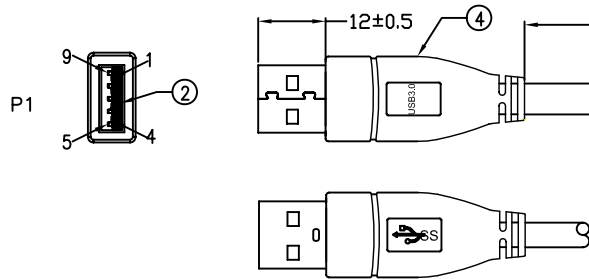


USB3.0 B TYPE MALE

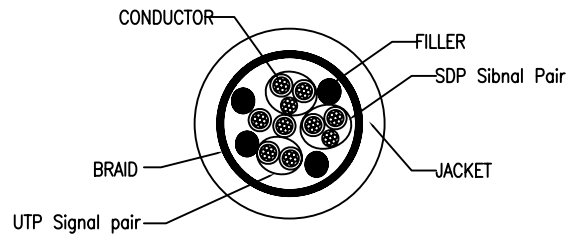

CABLE SPEC.

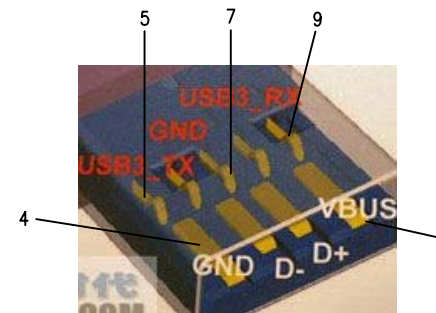

USB 3.0 A M-PIN 3D SPEC.

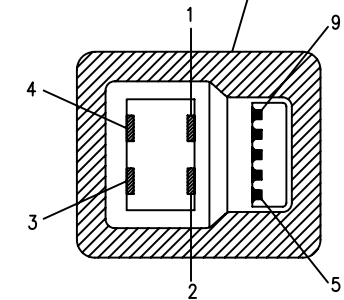


USB 3.0 B M-PIN SPEC.

NOTE:

1.ELECTRICAL TEST:

- (1)100% OPEN SHORT & MIS WIRE TEST.
- (2)CONTACT RESISTANCE 3 ohm Max .
- (3)INSULATION RESISTANCE 10M ohm Min. AT DC300V
- (4)HI-POT DC300V FOR ONE MINUTE.

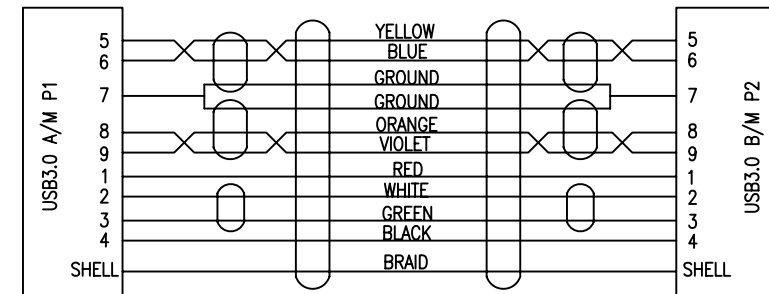

					Tolerance			Inch		M/M		EBE TECHNOLOGY(HK) LIMITED											
					.X		.015		.30														
					4		PVC	BLACK PVC 45P			AR				.XX		.010		.10		Title: USB3.0 A/M TO USB3.0 B/M BLACK CABLE		
					3		CONN.	USB3.0 B/M TYPE CONTACT:GOLD(15U"),INSULATOR:BLUE,SHELD:NI,ASSEMBLED			1				.XXX		.005		.05				
2		CONN.	USB3.0 A/M TYPE CONTACT:GOLD(15U"),INSULATOR:BLUE,SHELD:NI,ASSEMBLED			1				Draw:		LUHUAXIN				Customer No.:							
1		CABLE	20276(1P*28#+D+AL+MY)*2C+1P*28#+2C*28#+AL+B OD:5.5 JACKET:BLACK USB3.0			1				Check:		Drawing No:											
ITEM		NAME	DESCRIPTION			Q'TY		REMARK		App'd:		Units		m/m		Date		05-06-10		REV.		A	
												Angle		± °		Third Angle Projection				Sheet		1/1	
												Scale		NONE									