
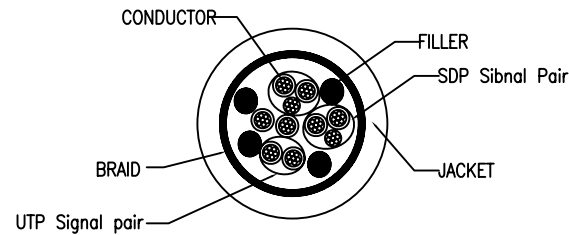


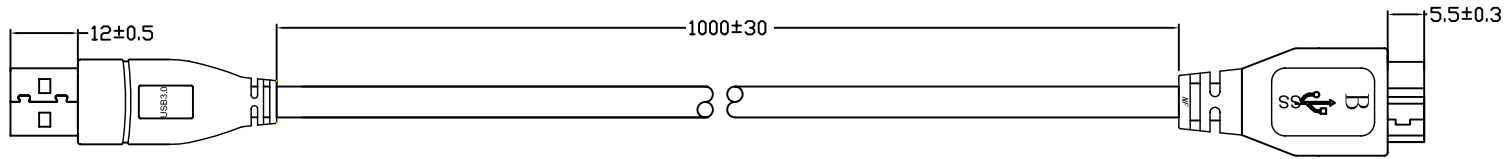


RoHS-COMPLIANT


LTR	REV.	DESCRIPTION	DATE	REVISED	APP'D

Micro USB3.0 B/M

USB3.0 A/M



CABLE SPEC.

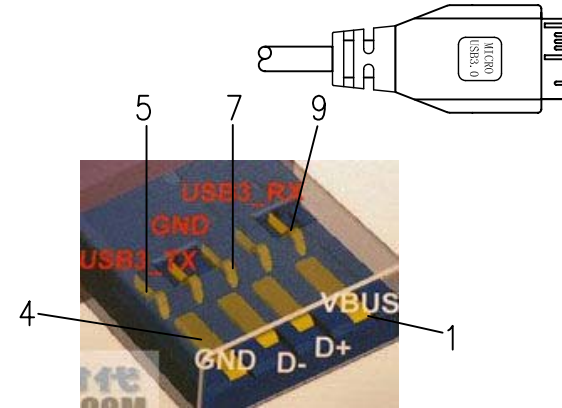


USB 3.0 A M-PIN 3D SPEC.

NOTE:

1.ELECTRICAL TEST:

- (1)100% OPEN SHORT & MIS WIRE TEST.
- (2)CONTACT RESISTANCE 3 ohm Max .
- (3)INSULATION RESISTANCE 10M ohm Min. AT DC300V
- (4)HI-POT DC300V FOR ONE MINUTE.

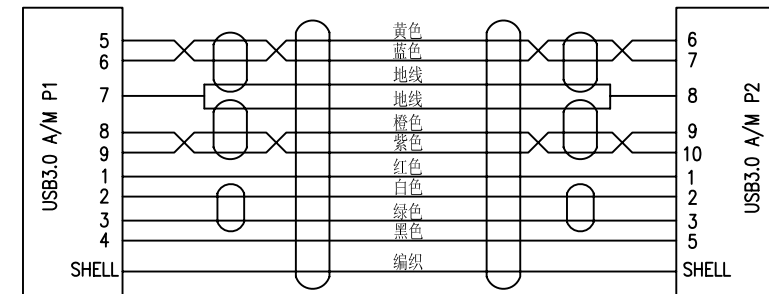

ITEM	NAME	DESCRIPTION	Q'TY	REMARK	Tolerance	Inch	M/M	EBE TECHNOLOGY(HK) LIMITED			
4	PLASTIC	BLACK PVC 45P	AR		.X	.015	.30	Title: USB3.0 A/M TO Micro USB3.0 B/M BLACK CABLE			
3	CONN.	Micro USB3.0 B/M CONTACT:AU 15U" IINSULATION:BLACK SHELL:NI PLATED ASSEMBLED	1		.XX	.010	.10				
2	CONN.	USB3.0 A/M CONTACT:AU 15U",INSULATOR:BLUE,SHELL:NI PLATED,ASSEMBLED	1		.XXX	.005	.05				
1	CABLE	UL20276(1P*28#+D+AL+MY)*2C+1P*28#+2C*24#+AL+B(TC) OD:5.5 JACKET:BLACK USB3.0	1		Draw: LUHUAXIN			Customer No.:			
					Check:			Drawing No:			
					App'd:			Units	m/m	Date	20-07-10
								Angle	± °	REV.	A
								Scale	NONE	Third Angle Projection	Sheet 1/1